

Athomo RGB




Date: 20.06.2018
Operator: PR

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL2942MERG Athomo Medium RGB sym / Luminaire Data Sheet

Luminous emittance 1:

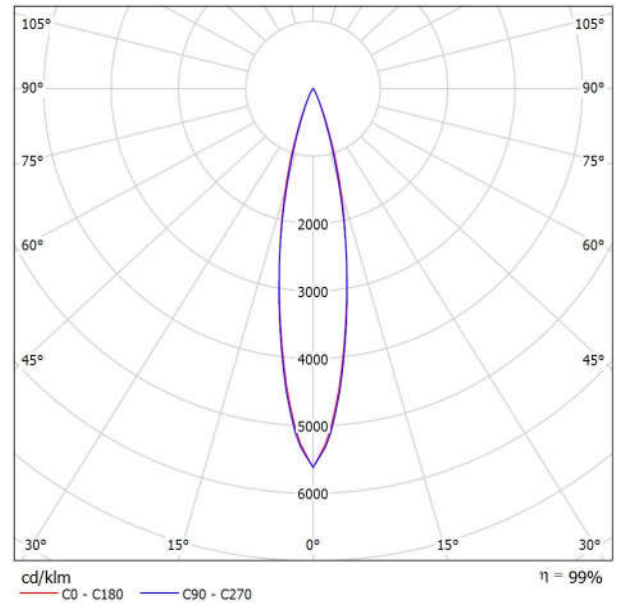

Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 99

Griven Srl AL2942MERG Athomo Medium RGB
sym
Article No.: AL2942MERG
Luminous flux (Luminaire): 34 lm
Luminous flux (Lamps): 34 lm
Luminaire Wattage: 3.6 W
Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 99
Fitting: 1 x RGB LEDs (Correction Factor 1.000).


Available in IP67 and IP68 versions, ATHOMO RGB is a recessed walk-on LED uplight for exterior and interior use which delivers a distinctive light output for directive application or decorative lighting patterns creation. Featuring stainless steel cover and scratch-resistant glass, ATHOMO is available in RGB or monochrome versions on request. Durable dynamic interaction with the surrounding architectural environment and functional orientation signalling are enhanced by this discreetly essential solution.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL2942MERC Athomo Medium RGB sym / Cone Diagram

Luminaire: Griven Srl AL2942MERC Athomo Medium RGB sym
Lamps: 1 x RGB LEDs

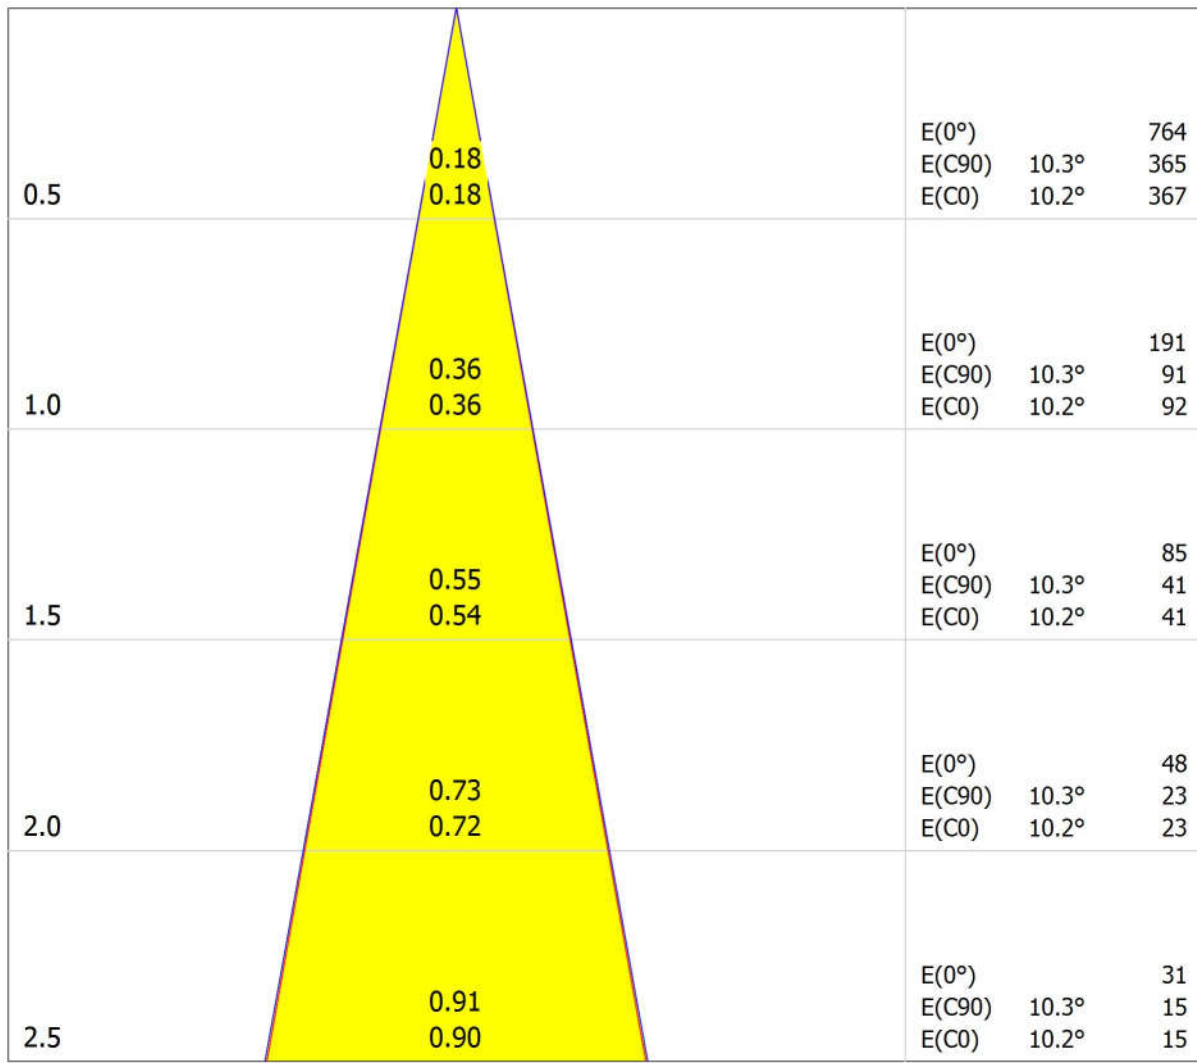

Distance [m] Cone Diameter [m] Illuminance [lx]


- C0 - C180 (Half-value Angle: 20.4°)
- C90 - C270 (Half-value Angle: 20.6°)

Griven S.r.l.
 Via Bulgaria, 16
 46042 Castel Goffredo, MN, Italy

Operator PR
 Telephone 0376779483
 Fax 0376779682
 e-Mail griven@griven.com

Griven Srl AL2942WIRG Athomo Wide RGB sym / Luminaire Data Sheet

Luminous emittance 1:

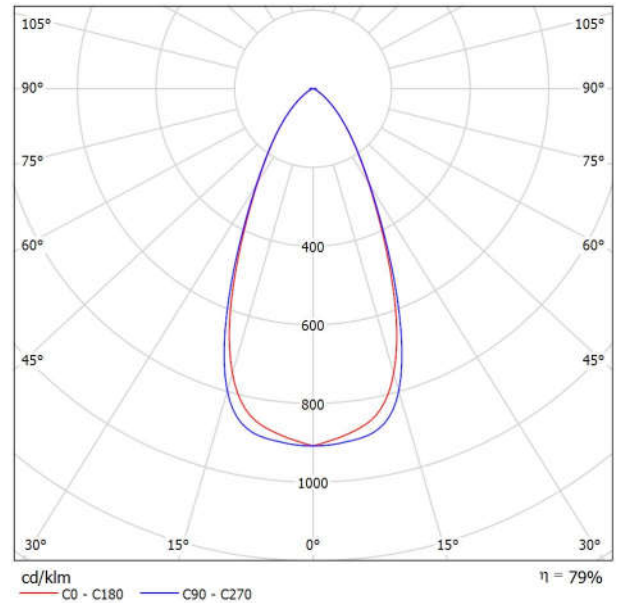

Luminaire classification according to CIE: 99
 CIE flux code: 86 97 99 99 79

Griven Srl AL2942WIRG Athomo Wide RGB sym
 Article No.: AL2942WIRG
 Luminous flux (Luminaire): 33 lm
 Luminous flux (Lamps): 42 lm
 Luminaire Wattage: 3.6 W
 Luminaire classification according to CIE: 99
 CIE flux code: 86 97 99 99 79
 Fitting: 1 x RGB LEDs (Correction Factor 1.000).


Available in IP67 and IP68 versions, ATHOMO RGB is a recessed walk-on LED uplight for exterior and interior use which delivers a distinctive light output for directive application or decorative lighting patterns creation. Featuring stainless steel cover and scratch-resistant glass, ATHOMO is available in RGB or monochrome versions on request. Durable dynamic interaction with the surrounding architectural environment and functional orientation signalling are enhanced by this discreetly essential solution.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL2942WIRG Athomo Wide RGB sym / Cone Diagram

Luminaire: Griven Srl AL2942WIRG Athomo Wide RGB sym
Lamps: 1 x RGB LEDs

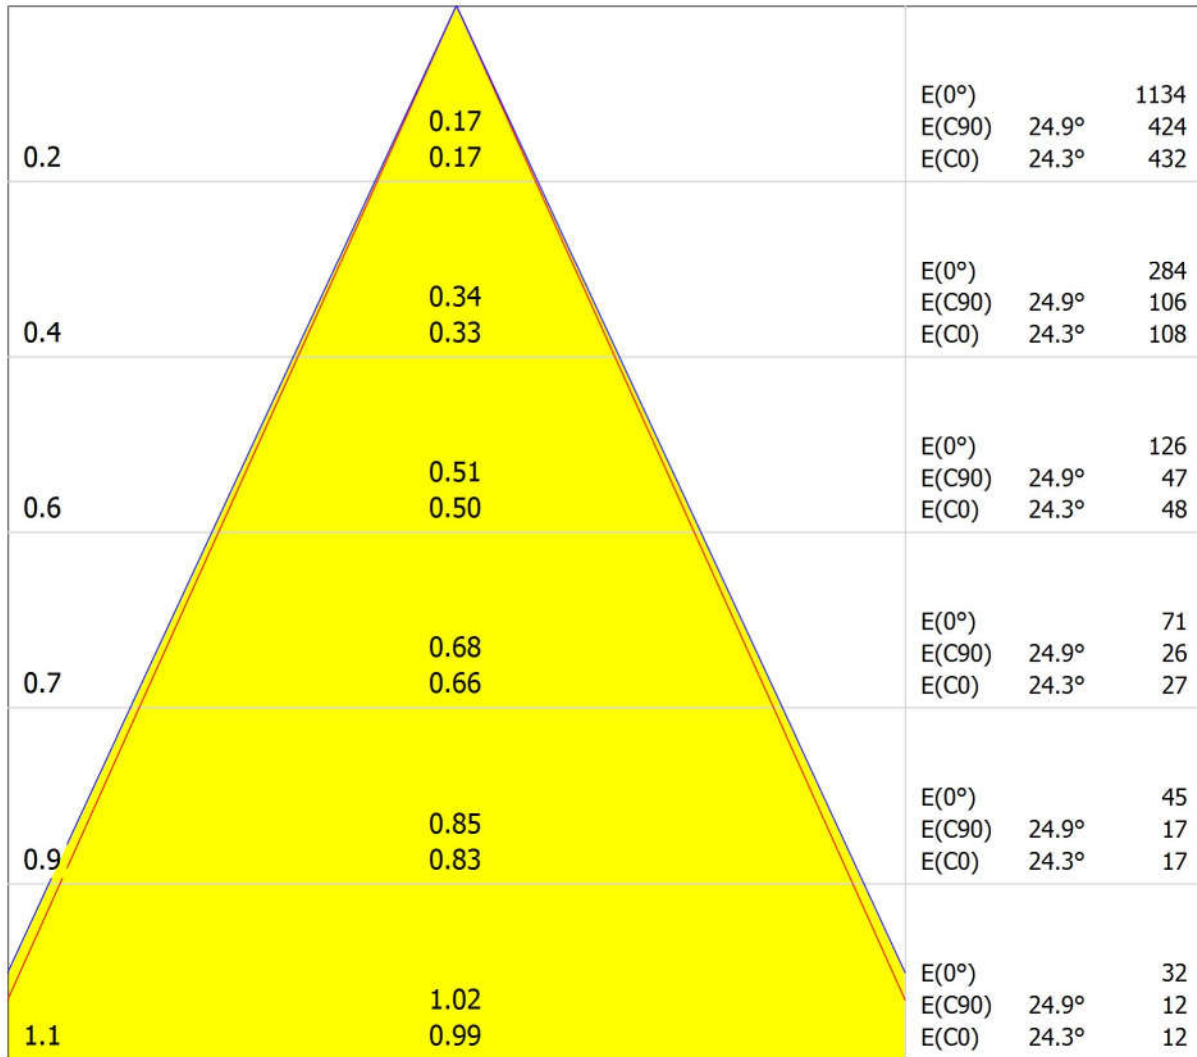

Distance [m] Cone Diameter [m] Illuminance [lx]

- C0 - C180 (Half-value Angle: 48.6°)
- C90 - C270 (Half-value Angle: 49.8°)