



Adelaide Oval

TELSTRA
PLAZA

Ticket Office

Adelaide Oval

South Gate

Adelaide Oval

CAPITAL 200

FAÇADE LIGHTING


Allowing a smooth blending in every architectural background through its modern design and extremely sleek profile, **CAPITAL 200** delivers a powerful output from a compact body with outstanding performances. Fitted with a variety of optional high build and design optics groups for the utmost optical efficiency, this versatile floodlight also assures balanced projection and photometric flexibility tailored to the selective demands of the most sophisticated architectural needs.



CAPITAL 200


CAPITAL 200

GRIVEND 

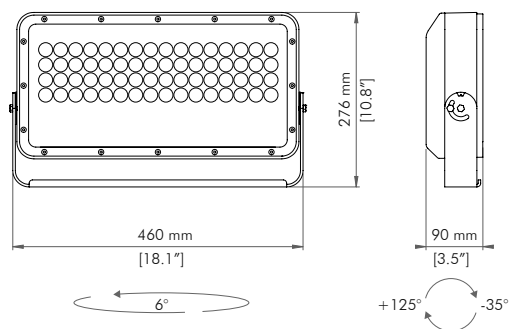

BEAM ANGLE REFERENCE

| RGBW | | WHITE LIGHT | |
|-----------------|---------------------|-----------------|---------------------|
| SPOT | 8° | SPOT | 12° |
| NARROW | 12° | NARROW | 15° |
| MEDIUM | 23° | MEDIUM | 25° |
| WIDE | 43° | WIDE | 47° |
| EXTRA WIDE | 68° | EXTRA WIDE | 61° |
| ELLIPTICAL | 11°x41° | ELLIPTICAL | 14°x39° |
| ELLIPTICAL WIDE | 22°x39° | ELLIPTICAL WIDE | 23°x37° |
| WALL WASH | 14°(5° incline)x37° | WALL WASH | 19°(5° incline)x38° |




MAX OUTPUT
16275 lm
(SP CW configuration)

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

FEATURES AND OPTIONS



ACCESSORIES

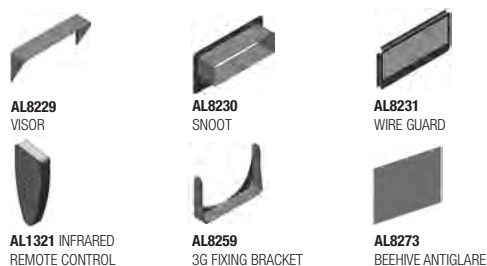

CODES

AL5010 CAPITAL 200

AL5012 CAPITAL 200 POLAR EDITION

OPTICS

SP Spot
NA Narrow
ME Medium
WI Wide
EW Extra wide
EL Elliptical
WL Elliptical wide
WW Wall wash

LED TYPE

RN RGB+W 4000K
DW From 2700K to 6500K
CW Cold White 6500K
NW Natural White 4000K
WW Warm White 3000K

CONTROL SYSTEM

R DMX-RDM
W DMX-RDM wireless
D DALI

FINISH

W White RAL 9003
G GRIVEN Grey
A Anthracite RAL 7016
B Black RAL 9005

CABLE TYPE

S POWER IN, DMX IN, DMX OUT
C Monocable with connectors
M Monocable without connectors
D POWER IN, DALI IN, DALI OUT

NOTES

Unless an RDM compatible control is used, CAPITAL 200 must always be purchased with AL1321 Infrared Remote Control. More CAPITAL 200 units can be controlled with one AL1321.

TECHNICAL SPECIFICATIONS

CAPITAL 200 is an IP67 medium sized floodlight, whose die cast aluminium body hosts 64 high brightness RGBW, Dynamic White, Cold White, Natural White, Warm White or, on request, monochrome power LEDs. Dimensions: 460 mm x 90 mm x 276 mm. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update), and RDM (Remote device management) functions. DALI or DMX-RDM wireless control available on request. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more CAPITAL 200 units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100÷277V / 50-60Hz. Power consumption: RGBW 0.71A @ 230V / 155W max, W 0.68A @ 230V / 148W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. The Polar Edition, fitted with an integrated de-icing system with electrically heated glass, is available on request. Operating temperature: -40°C to 50°C (-40°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE

