



12
11
10
9
8
7
6
5
4
3
2
1

REGNANDO VITTORIO EMANUELE II
BENITO MUSSOLINI CAPO DEL GOVERNO
QUESTA TIERRA VOLLE REDENTURA
DAL MILLENNIO LETARGICO DI MORTEFERA STERILITÀ
E FRESSO, LE VESTIGIE DI REMOTE CIVILTÀ
DIEDE VITA
SÌEN DA
CHE PORTA NEL NOME GLI AUSPICI DELLA SICUSTA DINASTIA PEGNANTE
EDIFICATA IN 233 GIORNI
DALL'OPERA NAZIONALE PER I COMBATTENTI
PRESIEDUTA DA
VALENTINO D'OSOLINI GENELLI
INIZIO LA SUA MISSIONE CIVICA
IL XV APRILE MCMXXXVI ANNO XII E F



CAPITAL 300 MC

FAÇADE LIGHTING


Featuring an elegant, stylish shape and a sleek profile, which allow a seamless integration in every architectural environment, **CAPITAL 300 MC** is the ideal solution for the dramatic illumination of large scale façades and high-rise buildings calling for high impact lighting. Responding to the lighting designer's need for aesthetic appeal and chromatic adaptability, **CAPITAL 300 MC** features multichip LEDs, which enhance seamless light distribution and smooth colour transition.



CAPITAL 300 MC


CAPITAL 300 MC

GRIVEND 

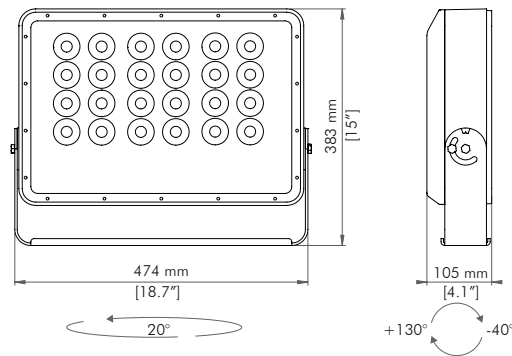

BEAM ANGLE REFERENCE

| | |
|--------|-----|
| SPOT | 7° |
| NARROW | 10° |
| MEDIUM | 23° |
| WIDE | 35° |



MAX OUTPUT
8830 lm
(SP DW configuration)

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

FEATURES AND OPTIONS



ACCESSORIES



AL8235
VISOR



AL8236
SNOOT



AL8237
WIRE GUARD



AL1321 INFRARED
REMOTE CONTROL



AL8260
3G FIXING BRACKET

CODES

AL5016 CAPITAL 300 MC

AL5017 CAPITAL 300 MC POLAR EDITION

OPTICS

SP Spot
NA Narrow
ME Medium
WI Wide

LED TYPE

RN RGB+W 4000K
DW From 3000K to 6500K

CONTROL SYSTEM

R DMX-RDM
W DMX-RDM wireless

FINISH

W White RAL 9003
G GRIVEN Grey
A Anthracite RAL 7016
B Black RAL 9005

CABLE TYPE

S POWER IN, DMX IN, DMX OUT
C Monocable with connectors
M Monocable without connectors

NOTES

Unless an RDM compatible control is used, CAPITAL 300 MC must always be purchased with AL1321 Infrared Remote Control. More CAPITAL 300 MC units can be controlled with one AL1321.

TECHNICAL SPECIFICATIONS

CAPITAL 300 MC is an IP67 powerful floodlight, whose die cast aluminium body hosts 24 high brightness RGBW or Dynamic White multichip LEDs. Dimensions: 474 mm x 105 mm x 383 mm. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update), and RDM (Remote device management) functions. DALI or DMX-RDM wireless control available on request. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more CAPITAL 300 MC units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100±277V / 50-60Hz. Power consumption: 1.2A @ 230V / 266W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. The Polar Edition, fitted with an integrated de-icing system with electrically heated glass, is available on request. Operating temperature: -40°C to 50°C (-40°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE

