



CAPITAL 600 US

FAÇADE LIGHTING

Combining a minimal, neat design with brilliant performance capabilities, **CAPITAL 600 US** features an ultra-spot, long-shot beam of light capable of reaching remarkable distances with accurate beam angle definition. The full independent control of each LED bank allows absolute freedom in the creation of impressive matching or divergent dynamic effects on previously unreachable and remote spots with a surprising luminous output.




CAPITAL 600 US


GRIVEN 

CAPITAL 600 US

GRIVEND

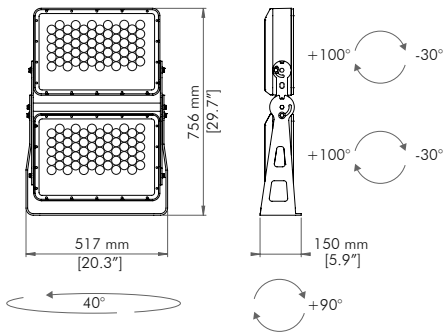

BEAM ANGLE REFERENCE

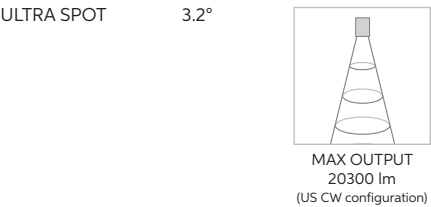

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

FEATURES AND OPTIONS



ACCESSORIES



CODES

AL5024 CAPITAL 600 US
AL5025 CAPITAL 600 US POLAR EDITION

LED TYPE	CONTROL SYSTEM	FINISH
RN RGB+W 4000K	R DMX-RDM	W White RAL 9003
DW From 2700K to 6500K	W DMX-RDM wireless	G GRIVEN Grey
CW Cold White 6500K	D DALI	A Anthracite RAL 7016
NW Natural White 4000K		B Black RAL 9005
WW Warm White 3000K		

CABLE TYPE

- S POWER IN, DMX IN, DMX OUT
- C Monocable with connectors
- M Monocable without connectors
- D POWER IN, DALI IN, DALI OUT

OPTICS*

AL8238 ULTRA SPOT OPTICS

NOTES

Unless an RDM compatible control is used, CAPITAL 600 US must always be purchased with AL1321 Infrared Remote Control. More CAPITAL 600 US units can be controlled with one AL1321. *CAPITAL 600 US must always be purchased with two of the above listed optics.

TECHNICAL SPECIFICATIONS

CAPITAL 600 US is an IP67 powerful single-mount light fitting, whose die cast aluminium body hosts 120 high brightness RGBW, Dynamic White, Cold White, Natural White, Warm White or, on request, monochrome power LEDs. Dimensions: 517 mm x 150 mm x 756 mm. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update), and RDM (Remote device management) functions. DALI or DMX-RDM wireless control available on request. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more CAPITAL 600 US units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100÷277V / 50-60Hz. Power consumption: 1.4A @ 230V / 312W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. The Polar Edition, fitted with an integrated de-icing system with electrically heated glass, is available on request. Operating temperature: -40°C to 50°C (-40°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



MOROCCO_Noor Tower, Ouarzazate